

Product Datasheet model uvex super OTG 9269 110

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic overspecs for prescription spectacle wearers with a flat lens for a wide field of vision, designed for maximum wearer acceptance
- side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm
- tested according to STANAG 2920
- Set includes:
 - uvex super f OTG spectacle
 - uvex microfibre bag 9954355
 - uvex microfibre cloth 9972130
 - uvex eyewear case 9954650

2. Technical Details Body

Front piece

Material	PA
Colour	black

Rivet

Material	brass, nickel-plated
----------	----------------------

Temple

Material	PA/TPE
Colour	black, clear

Marking


Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE
Tested acc. to STANAG	STANAG 2920

3. Technical Details Lens

Material	PC
Thickness	2,1 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400

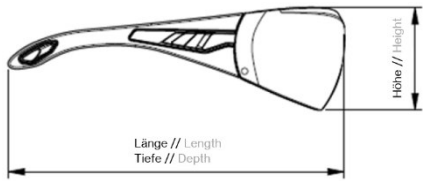


Marking according to EN

Filter	2C-1,2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T

Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	38g	
Dimensions (L x W x B) in approx. mm	  <p style="text-align: right;">picture only for reference</p>	
	161 x 157 x 58	
	Packing unit 1	Packing unit 2
EAN Code	4031101512297	
Quantity in pcs.	1	54
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>	
	95 x 200 x 90	600 x 400 x 300
Net weight in approx. g	38	2,052
Gross weight in approx. g	100	6,075
Country of Origin	Germany	

5. Miscellaneous

Standards	EN 166 + EN 170 + STANAG 2920
PPE Category	Category II