

Product Datasheet model uvex apache goggle set 9310265

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- goggle especially developed for military purpose – robust goggles with flame-retardant headband
- can be combined with conventional combat helmets and earmuffs
- suitable for prescription spectacle wearers due to RX insert
- soft, adaptive face seal with foam layer providing a universal fit for different head and facial shapes as well as a tight fit without pressure point
- extra-wide, length-adjustable textile headband for optimal low pressure hold and individual adaptability
- completely distortion-free lenses
- easy lens replacement possible
- high-performance polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- Metal-free
- tested in accordance with STANAG 2920/4296 and MIL-PRF-32432A
- Set includes:
 - goggle with clear UV filter
 - replacement lens UV filter orange 65%
 - replacement lens sunglare protection filter grey 14%
 - uvex microfibre bag for spectacles (2x) 9954 360
 - uvex microfibre bag for goggles 9954 360

2. Technical Details Body

Frame

Material	TPU
Version	indirect ventilation
Colour	black

Headband hooks

Material	PA
Colour	black



Headband


Material	Nomex
Features	individual adjustable
Colour	black

Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Field of use	3 (drops and splashes of liquid) 4 (large dust particles)
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

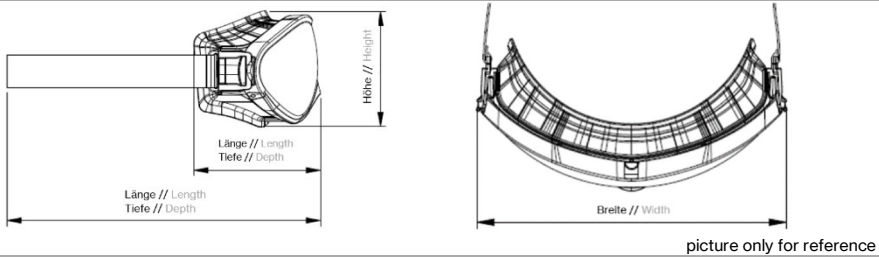

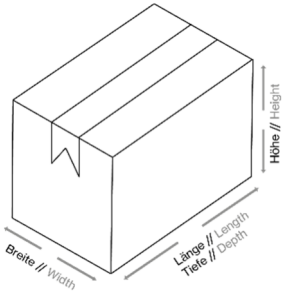
3. Technical Details Lens

Material	PC	
Thickness	2.3 mm bei PD	
Coating	uvex supravision excellence	
Colour	clear / orange / grey 14%	
Transmission	clear	>88%
	orange	65%
	grey	14%
UV protection	UV400	
Marking clear lens		
Filter	2C-1.2 (EN 170)	
Manufacturer 's ID code	W	
Optical class	1	
Impact resistance	B (120 m/s)	
Resistance to high speed particles at extremes of temperature	T	
Scratch resistance	K	
Antifog	N	
Conformity symbol	CE	
Factory symbol		
Marking orange lens		
Filter	2-1.4 (EN 170)	
Manufacturer 's ID code	W	
Optical class	1	
Impact resistance	B (120 m/s)	
Resistance to high speed particles at extremes of temperature	T	
Scratch resistance	K	
Antifog	N	
Conformity symbol	CE	
Factory symbol		

Marking grey 14% lens	
Filter	5-3.1 (EN 172)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	120g	
Dimensions (L x W x H) in approx. mm		
	67 x 211 x 78	
	Packing unit 1	Packing unit 2
EAN Code	4031101702469	4031101876733
Quantity in pcs.	1	55
Dimensions (L x W x H) in approx. mm		
	90 x 215 x 90	600 x 400 x 400
Net weight in approx. g	200	11,000
Gross weight in approx. g	218	12,990
Country of Origin	Czech Republic	

5. Miscellaneous

Standards	EN 166 + EN 170 + EN 172 + STANAG 2920/4296 + MIL-PRF-32432A
PPE Category	Category II