

SecureFit™ 3700 Series

Description

Get over-the-glass protection with all day wearability with the 3M™ SecureFit™ 3700 Series. The adjustable ratchet temples provides five adjustment points on the temple to help create a secure and personalized fit. The eyewear features pressure diffusion temple technology and a soft touch nosepiece to help provide long-wearing comfort.

Key Features

- Pressure Diffusion Temple (PDT) technology
- Absorbs 99.9 % UVA and UVB
- Over-the-glass lens design
- Soft nosepad
- Pantoscopic tilt
- Alternate fit nose piece
- Optional brow guard



Product Number	3M I.D. Number	UPC	Description
SF3701SGAF-BLU	70-0717-3196-5	50051131278962	3M™ SecureFit™ 3700 Series, SF3701SGAF-BLU, Blue Temple, Scotchgard™ Anti-Fog Coating, Clear OTG AF-AS lens 10ea/cs
SF3701SGAF-GRN	70-0717-3208-8	50051131279112	3M™ SecureFit™ 3700 Series, SF3701SGAF-GRN, Lime Green Temple, Scotchgard™ Anti-Fog Coating, Clear OTG AF-AS lens, 10ea/cs
SF3701SGAF-ORG	70-0717-3294-8	50068060428788	3M™ SecureFit™ 3700 Series, SF3701SGAF-ORG, Orange Temple, Scotchgard™ Anti-Fog Coating, Clear OTG AF-AS lens 10ea/cs
SF3701ASGAF-BLU	70-0717-3215-3	50051131279181	3M™ SecureFit™ 3700 Series, SF3701ASGAF-BLU, Alternate Fit, Blue, Scotchgard™ Anti-Fog Coating, Clear OTG AF-AS lens 10ea/cs
SF3701XSGAF-BLU	70-0717-3203-9	50051131279068	3M™ SecureFit™ 3700 Series, SF3701XSGAF-BLU, Blue Temple, Browguard, Scotchgard™ Anti-Fog Coating, Clear OTG AF-AS lens, 10ea/cs
SF3701XSGAF-RED	70-0717-3300-3	50068060428849	3M™ SecureFit™ 3700 Series, SF3701XSGAF-RED, Gray Temple, Browguard, Scotchgard™ Anti-Fog, Clear OTG AF-AS lens 10/cs
SF3701XASGAF-BLU	70-0717-3291-4	50068060428764	3M™ SecureFit™ 3700 Series, SF3701XASGAF-BLU, Alternate Fit, Blue, Browguard, Scotchgard™ Anti-Fog, Clear OTG AF-AS lens 10/cs
SF3701AS-BLU	70-0717-3197-3	50051131278979	3M™ SecureFit™ 3700 Series, SF3701AS-BLU, Blue Temple, Clear OTG Anti-scratch lens, 10ea/cs
SF3701AS-GRN	70-0717-3209-6	50051131279129	3M™ SecureFit™ 3700 Series, SF3701AS-GRN, Lime Green Temple, Clear OTG Anti-scratch lens, 10ea/cs
SF3701AS-ORG	70-0717-3299-7	50068060428832	3M™ SecureFit™ 3700 Series, SF3701AS-ORG, Orange Temple, Clear OTG Anti-scratch lens, 10ea/cs
SF3701XAS-BLU	70-0717-3204-7	50051131279075	3M™ SecureFit™ 3700 Series, SF3701XAS-BLU, Blue Temple, Browguard, Clear OTG Anti-scratch lens, 10ea/cs




Approximate Weight	
Eyewear (no brow guard)	43 g (1.6 oz)
Brow guard	3 g (0.1 oz)
Approximate Physical Dimension	
Lens (Top)	155 mm
Lens (Height)	55 mm
Material Composition	
Lens	Polycarbonate (clear)
Frame	Polycarbonate
Nosepiece (hard)	Polycarbonate
Nosepad (soft)	TPE
Temple	Xylex
Temple Hinge	Stainless steel screw (top)
Temple Ratchet	Polyamide
Brow Guard (hard)	Polycarbonate
Brow Guard (soft)	TPE

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)

Representative Transmittance Spectrum (200 - 2000 nm)

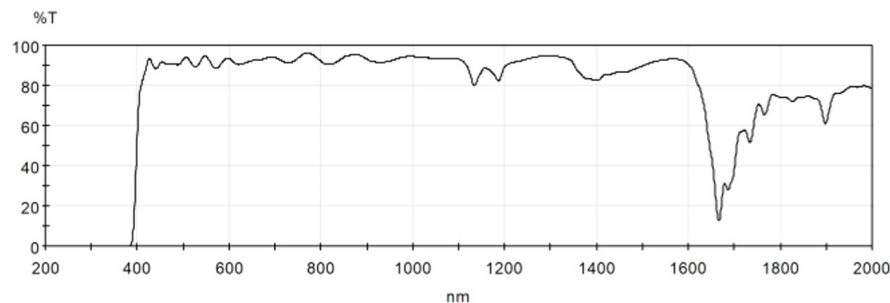

ANSI Z87.1 Transmittance Requirement Classification	
Visible Light Filter (380 - 780 nm)	Clear
Ultraviolet Filter (200 - 380 nm)	U6
Infrared Filter (780 - 2000 nm)	Not rated
Welding Filter	Not rated

Other Noted Ratings

- Impact: Z87+

Storage

3M Personal Safety Division

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (sunlight, IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

Product Number	3M I.D. Number	UPC	Description
SF3702SGAF-BLU	70-0717-3198-1	50051131279020	3M™ SecureFit™ 3000 Series, SF3702SGAF-BLU, Blue Temple, Scotchgard™ Anti-Fog Coating, Gray OTG AF-AS lens, 10 EA/Case
SF3702XSGAF-BLU	70-0717-3205-4	50051131279082	3M™ SecureFit™ 3700 Series, SF3702XSGAF-BLU, Blue Temple, Browguard, Scotchgard™ Anti-Fog Coating, Gray OTG AF-AS lens, 10ea/cs
SF3702AS-BLU	70-0717-3199-9	50051131279037	3M™ SecureFit™ 3700 Series, SF3702AS-BLU, Blue Temple, Gray OTG Anti-scratch lens, 10ea/cs




Approximate Weight	
Eyewear (no brow guard)	43 g (1.6 oz)
Brow guard	3 g (0.1 oz)
Approximate Physical Dimension	
Lens (Top)	155 mm
Lens (Height)	55 mm
Material Composition	
Lens	Polycarbonate (clear)
Frame	Polycarbonate
Nosepiece (hard)	Polycarbonate
Nosepad (soft)	TPE
Temple	Xylex
Temple Hinge	Stainless steel screw (top)
Temple Ratchet	Polyamide
Brow Guard (hard)	Polycarbonate
Brow Guard (soft)	TPE

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)

Representative Transmittance Spectrum (200 - 2000 nm)

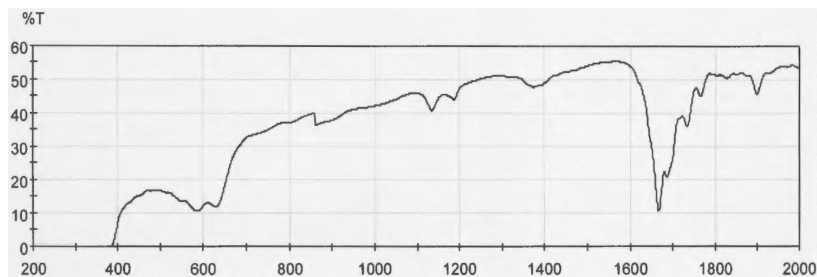

ANSI Z87.1 Transmittance Requirement Classification	
Visible Light Filter (380 - 780 nm)	L3
Ultraviolet Filter (200 - 380 nm)	U6
Infrared Filter (780 - 2000 nm)	Not rated
Welding Filter	Not rated

Other Noted Ratings

- Impact: Z87+

Storage

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (sunlight, IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

Product Number	3M I.D. Number	UPC	Description
SF3703SGAF-GRN	70-0717-3210-4	50051131279112	3M™ SecureFit™ 3700 Series, SF3703SGAF-GRN, Green Temple, Scotchgard™ Anti-Fog Coating, Amber OTG AF-AS lens, 10ea/cs




Approximate Weight	
Eyewear (no brow guard)	43 g (1.6 oz)
Brow guard	3 g (0.1 oz)
Approximate Physical Dimension	
Lens (Top)	155 mm
Lens (Height)	55 mm
Material Composition	
Lens	Polycarbonate (Amber)
Frame	Polycarbonate
Nosepiece (hard)	Polycarbonate
Nosepad (soft)	TPE
Temple	Xylex
Temple Hinge	Stainless steel screw (top)
Temple Ratchet	Polyamide
Brow Guard (hard)	Polycarbonate
Brow Guard (soft)	TPE

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)

Representative Transmittance Spectrum (200 - 2000 nm)

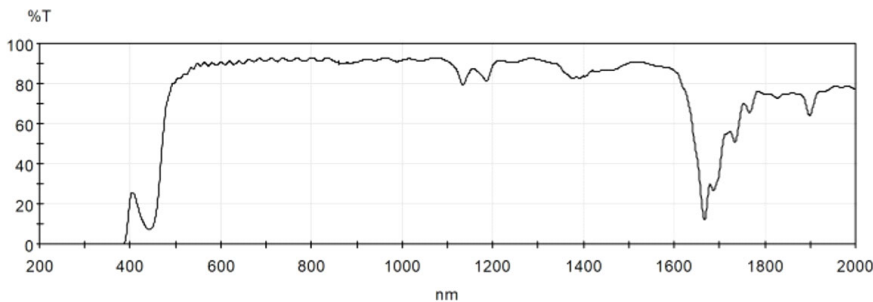

ANSI Z87.1 Transmittance Requirement Classification	
Visible Light Filter (380 - 780 nm)	Not rated
Ultraviolet Filter (200 - 380 nm)	U6
Infrared Filter (780 - 2000 nm)	Not rated
Welding Filter	Not rated

Other Noted Ratings

- Impact: Z87+

Storage

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (sunlight, IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

Product Number	3M I.D. Number	UPC	Description
SF3707SGAF-BLU	70-0717-3206-2	50051131279099	3M™ SecureFit™ 3700 Series, SF3707SGAF-BLU, Blue Temple, Scotchgard™ Anti-Fog Coating, Indoor/Outdoor Gray OTG AF-AS lens 10ea/cs
SF3707XSGAF-BLU	70-0717-3217-9	50051131279204	3M™ SecureFit™ 3700 Series, SF3707XSGAF-BLU, Blue Temple Browguard, Scotchgard™ Anti-Fog Coating, I/O Gray OTG AF-AS lens, 10ea/cs
SF3707AS-BLU	70-0717-3207-0	50051131279105	3M™ SecureFit™ 3700 Series, SF3707AS-BLU, Blue Temple, Indoor/Outdoor Gray OTG Anti-scratch lens, 10ea/cs




Approximate Weight	
Eyewear (no brow guard)	43 g (1.6 oz)
Brow guard	3 g (0.1 oz)
Approximate Physical Dimension	
Lens (Top)	155 mm
Lens (Height)	55 mm
Material Composition	
Lens	Polycarbonate (Indoor/Outdoor)
Frame	Polycarbonate
Nosepiece (hard)	Polycarbonate
Nosepad (soft)	TPE
Temple	Xylex
Temple Hinge	Stainless steel screw (top)
Temple Ratchet	Polyamide
Brow Guard (hard)	Polycarbonate
Brow Guard (soft)	TPE

Regulatory/Standards (Markings)

- ANSI Z87.1-2015 (3M Z87+ U6)

Representative Transmittance Spectrum (200 - 2000 nm)

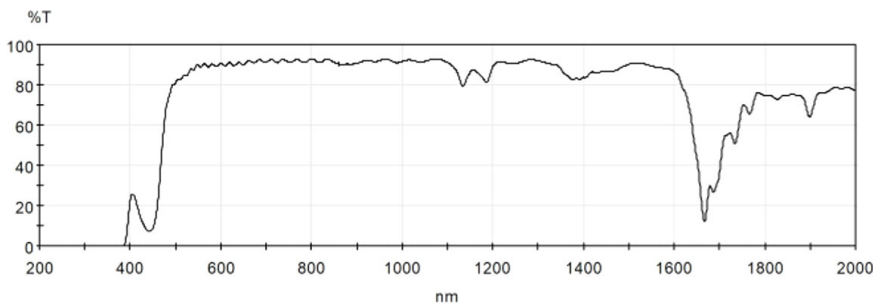

ANSI Z87.1 Transmittance Requirement Classification	
Visible Light Filter (380 - 780 nm)	L1.7
Ultraviolet Filter (200 - 380 nm)	U6
Infrared Filter (780 - 2000 nm)	Not rated
Welding Filter	Not rated

Other Noted Ratings

- Impact: Z87+

Storage

Eyewear should be stored between temperatures of 50 °F (10 °C) and 86 °F (30 °C), in dry conditions with no chemical exposure, out of any direct exposure to radiation (sunlight, IR, UV, etc.), and in non-abrasive environments.

Cleaning

Thoroughly clean all surfaces with a mild soap solution and lukewarm water, then rinse. Dry with a soft cloth or tissue. Do not use any solvents on these lenses.

i IMPORTANT NOTE

Before use, the wearer must read and understand the User Instructions provided as part of the product packaging.

Personal Safety Division

3M Center, Building 235-2W-70
St. Paul, MN 55144-1000

3M PSD products are occupational use only.

In United States of America

Technical Service: 1-800-243-4630
Customer Service: 1-800-328-1667
3M.com/workersafety

In Canada

Technical Service: 1-800-267-4414
Customer Service: 1-800-364-3577
3M.ca/Safety

© 3M 2019. All rights reserved.
3M, Scotchgard, and SecureFit are trademarks of 3M Company and its affiliates. Used under license in Canada. All other trademarks are property of their respective owners. Please recycle.

