

EU TYPE-EXAMINATION CERTIFICATE

according to Article 19 (c) of Regulation (EU) 2016/425 of the European Parliament and of the Council

No. 1019-194/Q/2024

Name of product: **2100T14 (AM450/120) - Anchorage point, Web, derived variants 2100T16 (AM450/150), 2100T17 (AM450/80), 2100T20 (AM450/60), 2100T22 (AM450/500), 2100T70 (AM450/200), 2100T73 (AM450/100), 2130005 (AM450/150NR)**

PPE category: **III.**

Manufacturer: **CAPITAL SAFETY GROUP - Banská Bystrica, s.r.o.
Jegorovova 35
974 01 Banská Bystrica
Slovakia**

Applied standards and/or technical specifications: **ČSN EN 354:2011 (identical to EN 354:2010)
ČSN EN 566:2017 (identical to EN 566:2017)
ČSN EN 795:2013 (identical to EN 795:2012)
ČSN EN 365:2005 (identical to EN 365:2004)**

Base for issue of certificate: **Evaluation Report No. 1019-021994/2024 (integral part of this certificate)**

Conditions of validity: **Certificate shall only be used in conjunction with one of the conformity assessment procedures referred to Article 19 (c) point (i) or (ii) of Regulation (EU) 2016/425 of the European Parliament and of the Council.**


Validity of certificate till: **May 1, 2029**

VVUU, a.s. hereby certifies that the sample of the product mentioned above meets all the relevant essential health and safety requirements of Annex II of the Regulation (EU) 2016/425 of the European Parliament and of the Council.



May 2, 2024

Date of issue


Tomáš Dorazil

Deputy Director NB 1019


Duplication of only parts of this document is subject to the approval of VVUU, a.s., NB 1019, Ostrava – Radvanice, Czech Republic.

Description of product

Material webbing:	PES webbings (width: 25 mm; colour: red, blue)
Threads:	PA; in contrasting colour to colour of webbings
Strength:	22 kN
Max. loading:	140 kg
Using:	The product must not be used separately for arrestment of user's free fall.
Anchor sling:	Type B acc. to EN 795, intended for using by only one person.
Trademark:	3M, Protecta

Type	Description
2100114 (AM450/120)	STRAP RING, 1.20 m, red
2100116 (AM450/150)	STRAP RING, 1.50 m, red
2100117 (AM450/80)	STRAP RING, 0.80 m, blue
2100120 (AM450/60)	STRAP RING, 0.60 m, blue
2100122 (AM450/500)	STRAP RING, 5.00 m, blue
2100170 (AM450/200)	STRAP RING, 2.00 m, red
2100173 (AM450/100)	STRAP RING, 1.00 m, red
2130005 (AM450/150NR)	STRAP RING, 1.50 m, blue

Picture of product

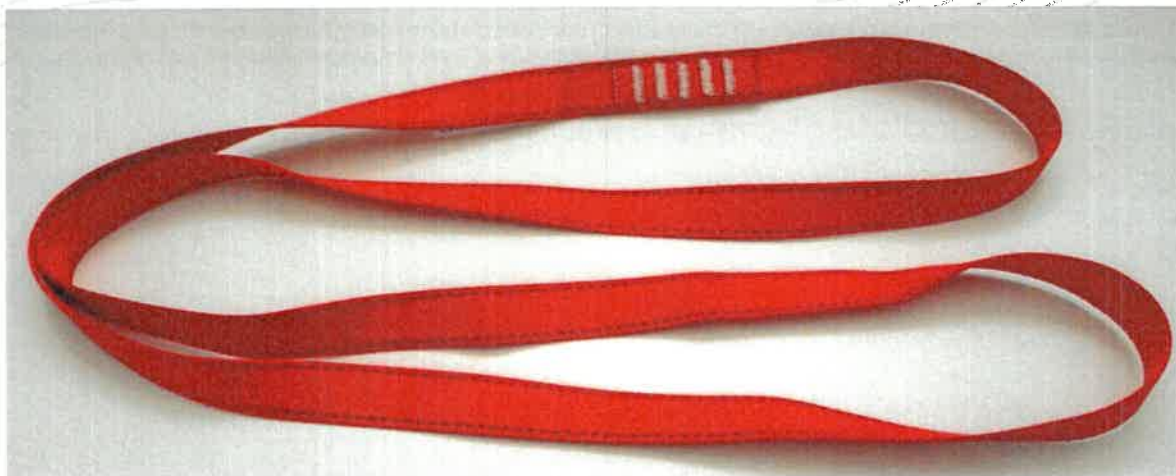

„Anchorage point, Web – derived variant 2100173 (AM450/100)“