


GL204HT

IMPACT UTILITY



ANSI/ISEA 105 – ABRASION 4 | PUNCTURE 5
EN388 – 3121XP

Synthetic Leather Palm for Enhanced Grip // Hook and Loop with TPR Wrist Closure // Pull Tab for Easy On/Off // Touchscreen Capability // TPR Impact Protection on Fingers and Knuckles // Mesh Stretch Fabric Back for Comfort and Breathability // PVC Palm Patches for Grip // Terry Cloth Thumb to Wipe Away Sweat and Grime // Hangtag for Retail Display

GL204HT S – 3XL

Suggested Applications


Construction // Demolition // Manufacturing // Auto Repair // Landscaping // General Maintenance // Fabricating // Warehousing // Packing

Glove Breakdown

Palm: Polyurethane + Nylon
Palm Patch: Polyvinyl Chloride + Polyethylene + Polyester
Back: Nylon + Spandex
Thumb: Cotton + Polyester
Closure: Thermoplastic Rubber + Nylon + Polyester
Impact: Thermoplastic Rubber

⚠ WARNING: Cancer and Reproductive Harm –P65Warnings.ca.gov

Testing Performance

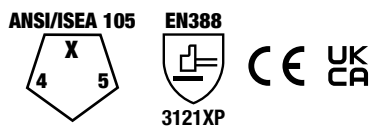

ANSI/ISEA 105

Cut	1	2	3	4	5	6	7	8	9	X
Abrasion	1	2	3	4	5	6				
Puncture	1	2	3	4	5					

EN388

Abrasion	1	2	3	4					
Circular Blade Cut	1	2	3	4	5	X			
Tear	1	2	3	4					
Puncture	1	2	3	4					
Cut TDM-100	A	B	C	D	E	F	X		
Impact Rated	P	F	X						

Product markings may vary // Updated as of 11.22



Glove Sizing

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11	3X-Large 12
------------	-------------	------------	---------------	----------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

Packaging

Inner Polybag: 1 pair on hangtag
Outer Polybag: 6 pair
Case: 60 pair
Made in Indonesia

